




DIPL
DUDHAT INDUSTRIES PVT. LTD.
YOUR PROFIT OUR PROMISE

LED STRIP LIGHT & LED STRIP ROPE LIGHT
CATALOGUE 2025-26

ONE CITY, ONE DEALER...
PEHLE CONNECT KARO, PEHLE LOCK KARO!

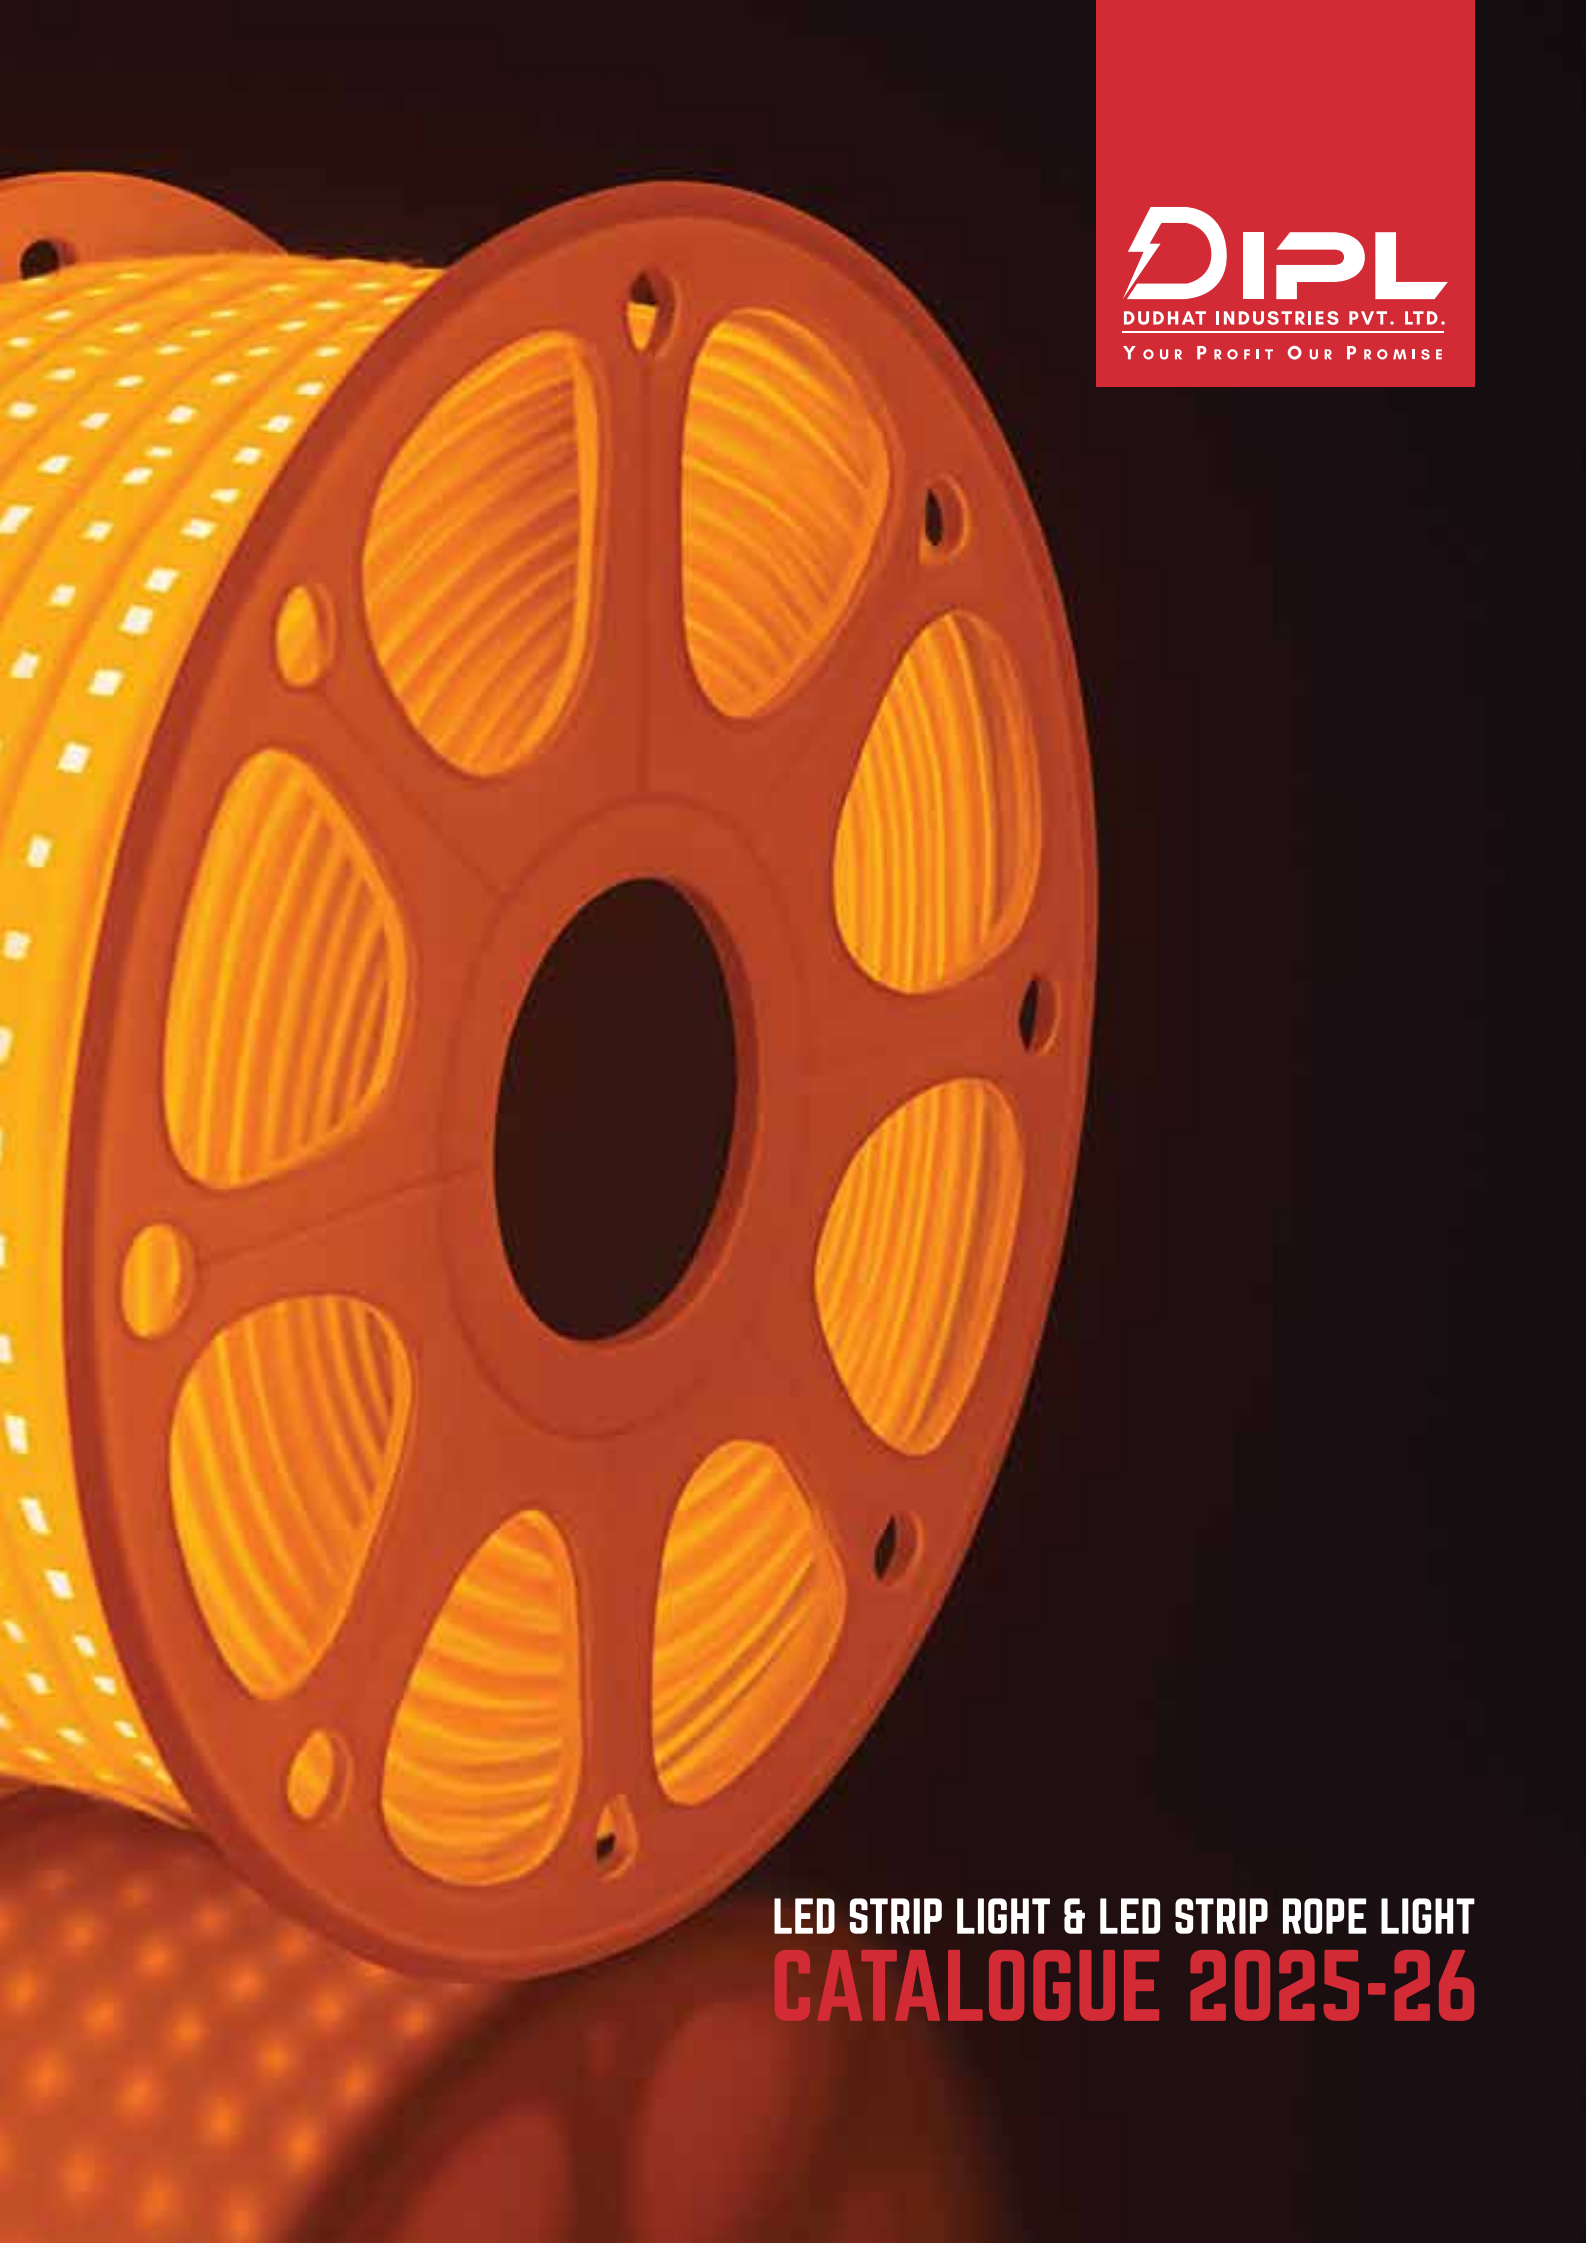

PROUDLY MADE IN INDIA

8MM LED ROPE LIGHT

AT UNBEATABLE CHINESE PRICES.



2-LAYER COPPER PCB ENSURES 10-METER UNIFORM BRIGHTNESS



■ HIGHER LM PER WATT 120L ■ >80CRI ■ HI-BOND 3M GUM TAP

LED STRIP LIGHT
SUPER FLEXIBLE DESIGN

JAHAN CHAAHO WAHAN LAGAO!

LIGHTING IS NOT JUST ABOUT VISIBILITY

It's about creating atmosphere, emotion, and connection.
The right light doesn't just illuminate a space; it transforms it,
bringing architecture to life and moments into memory

DIPL
BAZL INTILUTIVE SYSTEMS
QLUX

ABOUT US

Dudhat Industries Pvt. Ltd. is a leading light manufacturer based in Ahmedabad, Gujarat, specializing in high-quality LED lighting solutions for residential, commercial, and industrial applications. Established in 2003, the company has rapidly built a reputation for innovation, performance, and reliability in the lighting industry.



MISSION

Delivering cutting-edge lighting products that drive performance, sustainability, and value for customers.



VISION

A global leader in advanced lighting solutions, enhancing environments with precision and efficiency.



VALUE

Excellence, Innovation, Sustainability, Integrity, and Customer Focus.





CERTIFICATION




LED white light consistency

Colour consistency of LED lighting products is an important index of product colour quality, and colour tolerance is an important reference standard to measure this index. Most of DIPL's products adopt third-order colour tolerance, pure light colour, good consistency, and achieve subtle differences that cannot be recognized by human naked eyes.

colour tolerance: It is used to show the accuracy of human eyes visual differences in colours and distinguish similar Colours. It is expressed by the size of elliptical areas, the unit is commonly used instep (SCMI: The smaller the ellipse, the higher the accuracy.

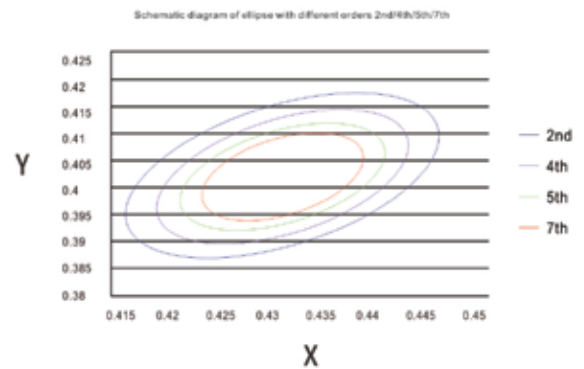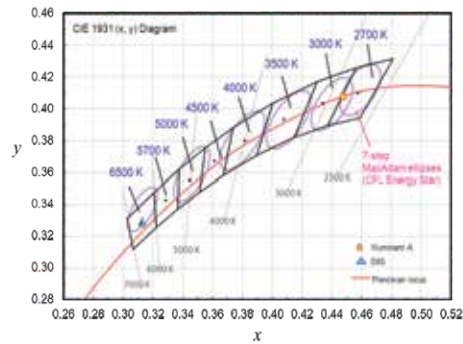

MacAdam 7 step, 5step, 3step, 2step, ellipse contrast at 3000K colour temperature
International requirements: colour tolerance of 7 step (SDCM, order)
EU ERP Directive: colour tolerance 6step (SDCM, order)
Energy Star ANSI: colour tolerance of 7 step (SCM, order)
colour tolerance of 3step, the human eye basically can not recognize the colour difference; colour tolerance is 5step, and the human eye can recognize it, with a slight colour difference; colour tolerance of 7step, the human eye can recognize, the colour difference is very obvious;

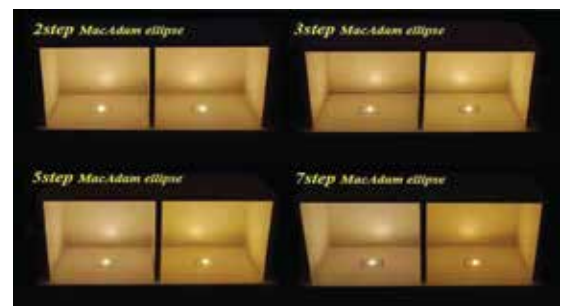

High CRI

Colour rendering index is an important method to evaluate the colour rendering of light source, and it is also an important parameter to measure the colour characteristics of artificial light source, which is expressed by Ra/CRI. Usually, the higher the value, the closer the colour of sunlight, and the closer it is to its true colour. In the props industry, LED lighting sources with high colour rendering index are usually selected. The products provided by DIPL usually adopt CRI > 95 according to customer needs, which can truly restore the colour of goods in lighting, so as to achieve pleasing to the eye and stimulate people's desire to buy.



RA>95/98



RA>83



RA>70

Ra5R9, R15

Generally, the colour rendering index Ra is the average of R1 to R8, and the colour rendering index CRI is the average of R1-R14. DIPL not only considers the general colour rendering index Ra, but also pays more attention to the special index R9 for saturation red and the special colour rendering index R9-R12 for saturation colours of red, yellow, green and blue. We think that these indexes truly represent the quality LED light source, while for commercial lighting sources, only when these indexes have high values can the high colour rendering of LED be guaranteed.



R9?

R9 is the colour rendering ability to red, and the larger the value, the higher the reduction of red. Simply put, the higher the lamp R9, the illumination in fruits, flowers and other occasions The effect is even better, even more colourful.




R15?

R15 is the colour rendering ability of oriental women's skin colour. The larger the value, the better the reduction ability of skin colour. It is more important in lighting counters such as cosmetics and clothing.




Explore TM-30 with higher light quality

DIPL In the process of technical communication with North American customers, It is found that they have higher and higher requirements for LED light colour rendering and high-quality light. Therefore, IES of North American Lighting Committee has defined a new evaluation method TM-30 for light source colour rendering ability, and put forward two brand-new test indexes Rf and Rg, which fully shows that international peers are really bringing forth new ideas in LED light research. For DIPL, we quickly introduce this kind of light evaluation method in the industry, so that Chinese people can fully enjoy higher quality LED light sources, thus leading the domestic trend.

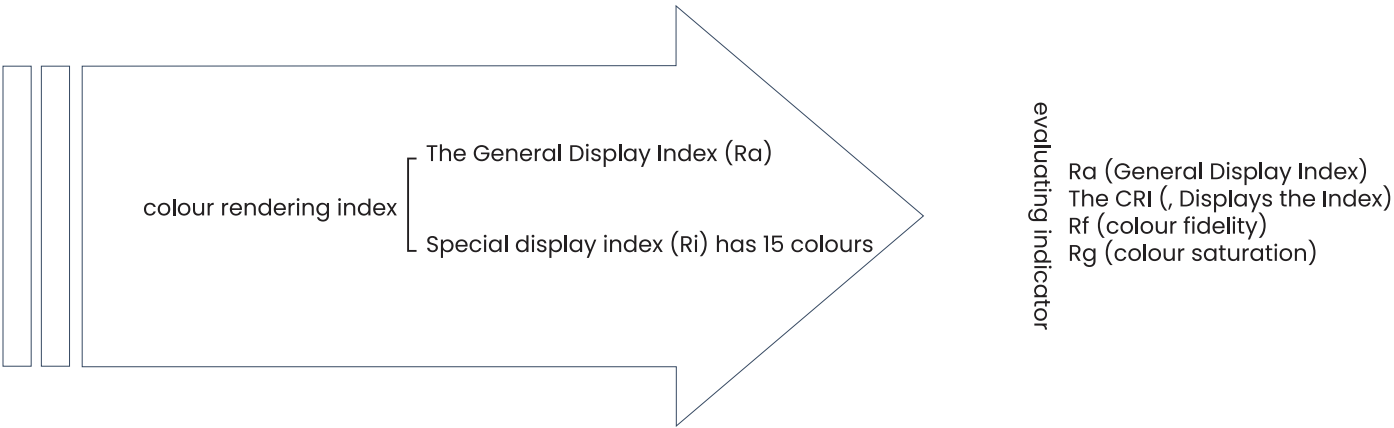

TM-30 colourimetric Icon

The TM-30 compares 99 colour samples, representing all the common colours that life can see (from saturated to unsaturated, from light to dark)

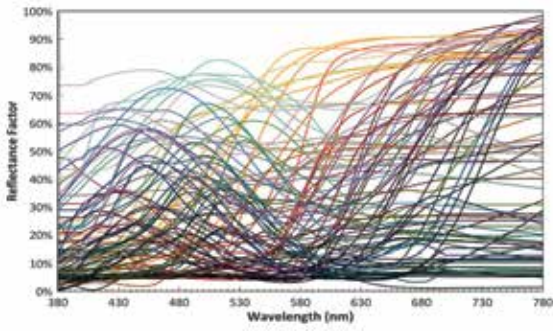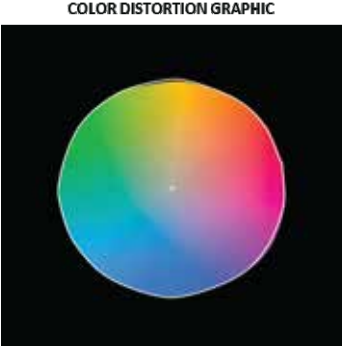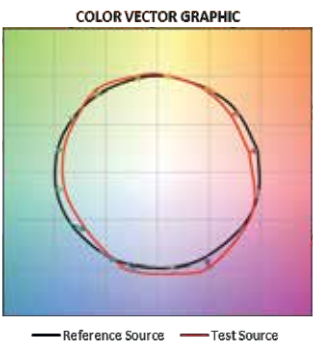

LED colour temperature

LED colour temperature is one of the most basic and important technical indexes for rating LED light colour, colour temp. not only affects the colour and senses of irradiated objects, but also often affects human emotions. LED light source in the props industry, no matter the importance of colour temperature is raised to any height, DIPL thinks it is not too much. It is expressed by absolute temperature K, that is, the standard blackbody is heated. When the temperature rises to a certain extent, the colour of the blackbody begins to be deep red-light red-orange-yellow-white-blue, and gradually changes. When the colour of a certain light source is the same as that of the blackbody, we call the absolute temperature of the blackbody as the LED colour temperature of the light source.

3200K




4000K



What is blue light?

The wavelength is between 400nm and 480nm, and it has relatively high energy. Blue light in this wavelength will increase the amount of toxin in macular area in glasses, which seriously threatens our fundus health.

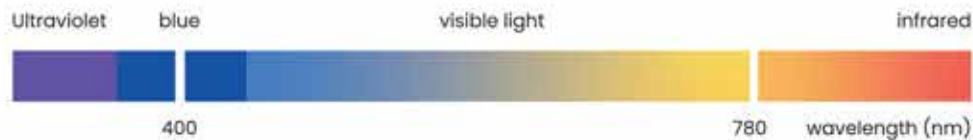

Blue light is an important part of visible light. There is no separate white light in nature. Blue light is mixed with green light and yellow light to present white light. Green light and yellow light have less energy, less irritation to eyes, and blue light has short wave and high energy, which can directly penetrate the lens and reach the fundus retina, causing photochemical damage to retina.

What are the dangers of blue light?

Blue light bands are not all harmful to human body, among which blue light within 400nm to 440nm is harmful blue light, while blue light between 480nm and 500nm can regulate biological rhythm, which is related to sleep, mood and memory, but beneficial to human body.


The damage of blue light to glasses is related to the irradiation time and intensity. When the illumination and irradiation time exceed two hours, it will cause damage to retina.

Blue light causes ocular disease




The reason why it is necessary to prevent blue light is that blue light can increase the amount of toxin in the macular area of eyes, resulting in the death of retinal epithelial cells, thus reducing vision. Moreover, blue light can affect the secretion of melatonin in human body, and make the sleep quality of human body decline, resulting in insomnia and other symptoms.

Macular region

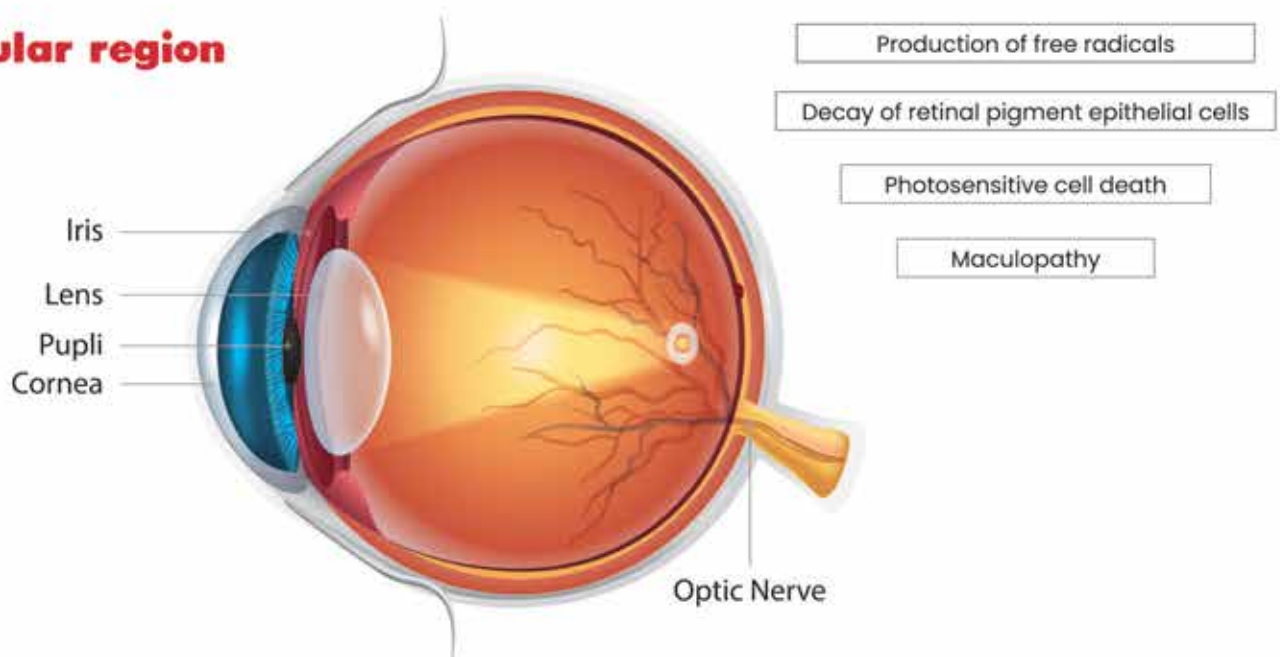


LED full spectrum?


Full Spectrum refers to the spectrum containing ultraviolet light, visible light and infrared light, and the ratio of red, green and blue in visible light is similar to that of sunlight, and the colour rendering index is close to 100. The spectrum of sunlight can be called the full spectrum, In the artificial light source, the mercury content in the arc tube of the arc discharge gas discharge lamp is appropriately increased, so as to increase the light energy of the ultraviolet part, and the metal halide ratio is adjusted, so that the wavelength combination of the visible part is close to the solar spectrum, and the infrared part with wavelength greater than 780nm has a continuous spectrum, which can last above 1000nm wavelength.

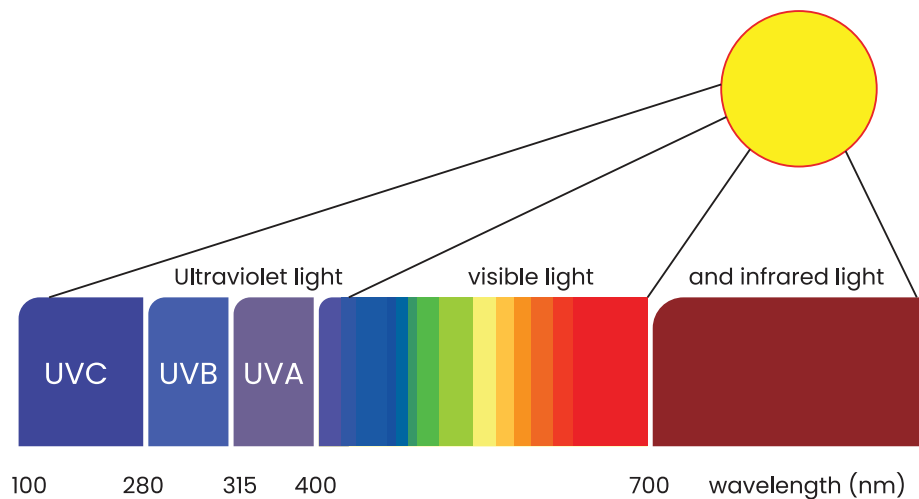

DIPL has developed the corresponding full light source product based on the harm of blue light, which is characterized by the closest to the sunlight, good spectral continuity, and strong colour restore ability. The colour index is close to 100 ($R_a > 97$, $CRI > 95$, $RI > 95$, $R_g > 98$).

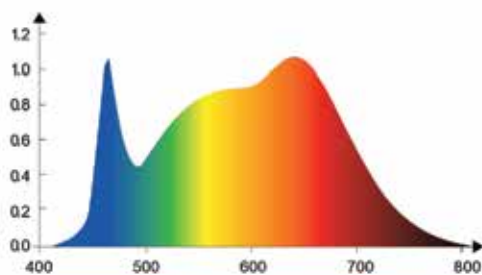

Conventional LED spectra

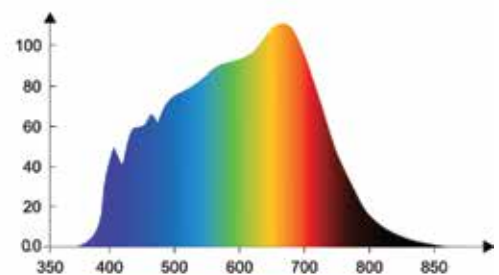

Resemble solar spectra



01 LED
ROPE LIGHT

16-47P

02 LED
STRIP LIGHT

48-73P

03 LED
SMPS


74-75P



**GLOW THAT WRAPS AROUND YOUR WORLD,
CREATING MOMENTS THAT TRULY STAND OUT.**



DIPL FLEXIBLE CUSTOMIZATION



IPxx



Optional IPxx protection level



CRI



Customizable CRI



Connection



Customizable special
connection structure



BIN




BIN area optional



Color



Customizable colors



Length



Customizable length



Packaging



Customizable packaging



Power



Customizable special power





Applications



Homes, Retail Outlets, Events & Parties, Garden Spaces, Balcony & Terrace Décor, Display Windows, and Seasonal Festive Decorations.



LC SERIES - 0001



Product Size

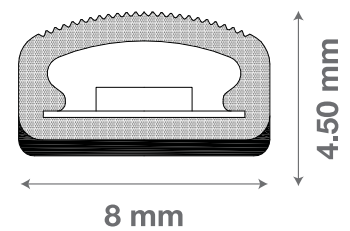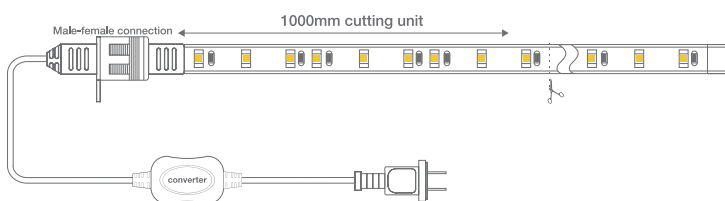

Available Colors

COOL WHITE

WARM WHITE

AMBER

RED

GREEN

BLUE

PINK

ICE BLUE


 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 48 LED/MTR	 lm 500 800/MTR	 CRI >70
---	--	--	--	---	---	---	--

Applications

Homes, Retail Outlets, Events & Parties, Garden Spaces, Balcony & Terrace Décor, Display Windows, and Seasonal Festive Decorations.

Technical Specifications

Model No.	LC Series - 0001
Quantity	25mtr 45mtr (customization)
Power Source	8w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	CW WW Other Colors (customization)
CRI	>70 (customization)
Luminous Efficiency	500lm/mtr 800lm/mtr (customization)
Flexible Pcb	6mm (30uA Aluminium) (customization)
No. Of Led	48 Led/mtr
Rated Life	15000 Hr (customization)
IP Rating	IP65

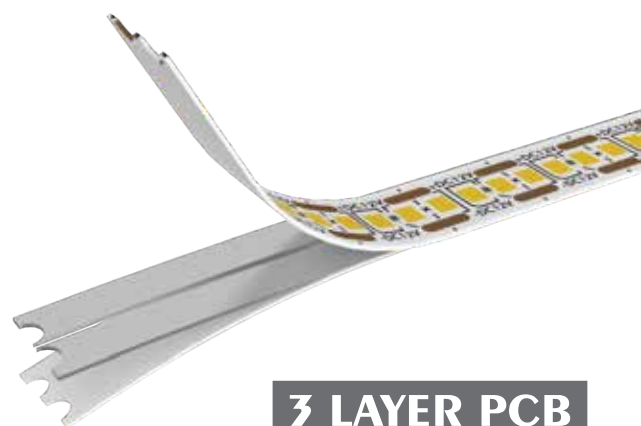

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
25M	10 BOX	--	--	--
45M	10 BOX	--	--	--








Applications

Suitable for Commercial and Architectural Lighting:
Showrooms, Malls, Hospitality Spaces, Landscape & Garden Lighting,
Building Elevations, Parking Areas, and Pathways.

LX SERIES - 0002



Product Size

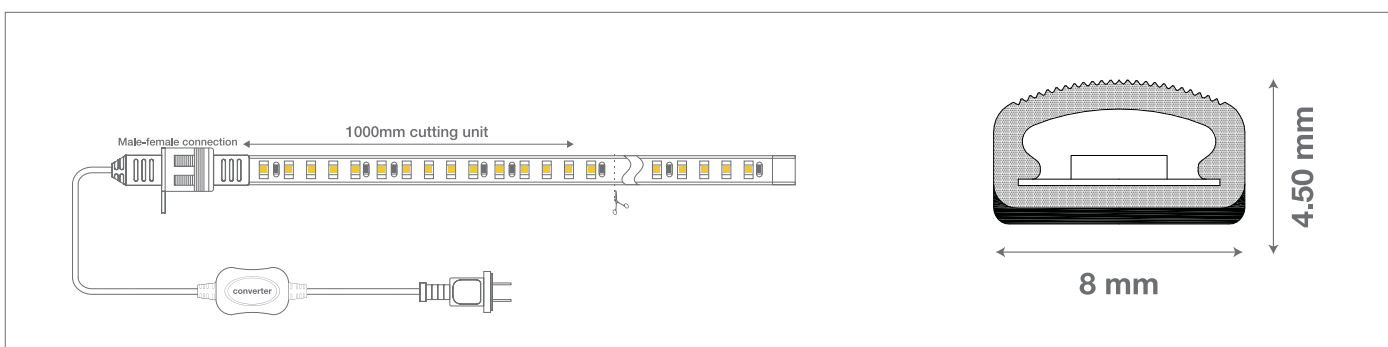

Available Colors

COOL WHITE

WARM WHITE

AMBER

RED

GREEN

BLUE

PINK

ICE BLUE


 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 120 LED/MTR	 lm 500 800/MTR	 CRI >70
---	--	--	--	---	--	---	--

Applications

Showrooms, Malls, Hospitality Spaces, Landscape & Garden Lighting, Building Elevations, Parking Areas, and Pathways.

Technical Specifications

Model No.	LX Series - 0002
Quantity	25mtr 45mtr (customization)
Power Source	8w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	CW WW Other Colors (customization)
CRI	>70 (customization)
Luminous Efficiency	500lm/mtr 800lm/mtr (customization)
Flexible Pcb	6mm (30uA Aluminium) (customization)
No. Of Led	120 Led/mtr
Rated Life	15000 Hr (customization)
IP Rating	IP65

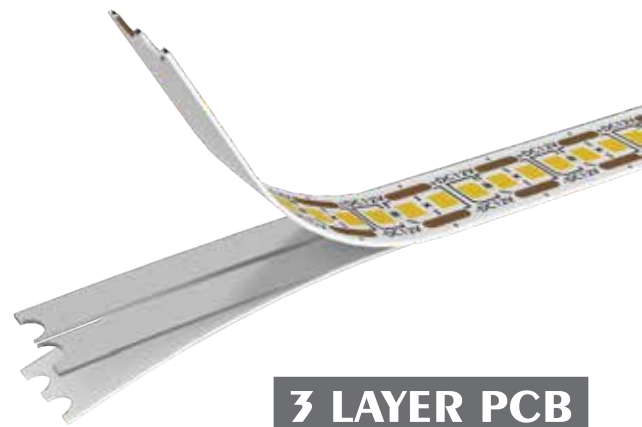

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
25M	10 BOX	--	--	--
45M	10 BOX	--	--	--







Applications


Ideal for Residential & Commercial Projects, Outdoor Spaces, Industrial Facilities (Factories, Plants, Warehouses), Petrol Pumps, Toll Plazas, Buildings and Architectural Monuments.



SX SERIES - 0003



Product Size

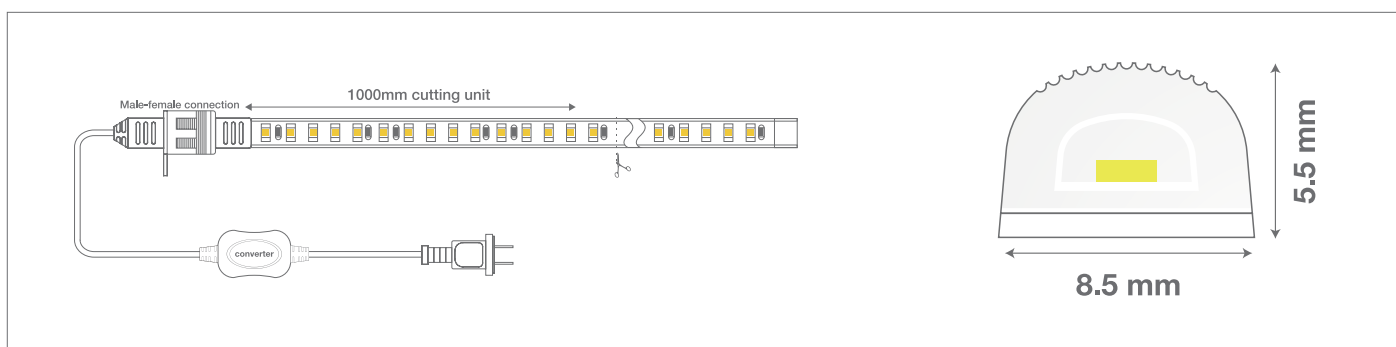

Available Colors

COOL WHITE

WARM WHITE

AMBER

RED

GREEN

BLUE

PINK

ICE BLUE


 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 120 LED/MTR	 lm 500 800/MTR	 CRI >70
---	--	--	--	---	--	---	--

Applications

Residential, Commercial, Outdoor spaces, Factories, Plants, Warehouses, Petrol Pumps, Toll Plaza, Building & Monuments.

Technical Specifications

Model No.	SX Series - 0003
Quantity	25mtr 45mtr 90mtr (customization)
Power Source	8w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	CW WW Other Colors (customization)
CRI	>70 (customization)
Luminous Efficiency	500lm/mtr 800lm/mtr (customization)
Flexible Pcb	6mm (30uA Aluminium) (customization)
No. Of Led	120 Led/mtr
Rated Life	20000 Hr (customization)
IP Rating	IP65

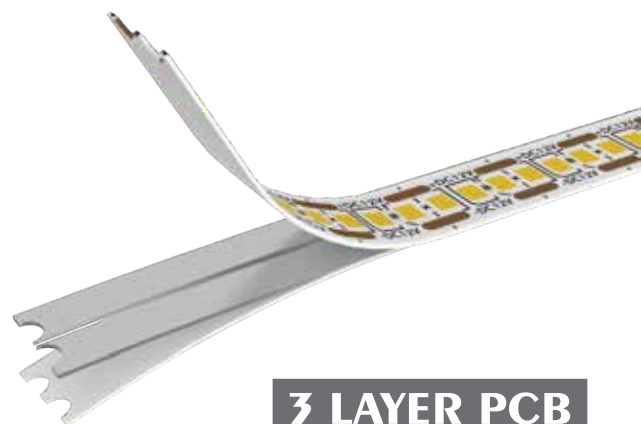

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
25M	10 BOX	--	--	--
45M	10 BOX	520*500*260	23KG	24.2KG
90M	4 BOX	484*245*385	17.2KG	18KG










Applications

Homes, balconies, gardens, stairs, windows, shop display borders, party decoration, festival lighting, and small indoor/outdoor décor projects.

P10C SERIES (10MM ROPE) - 0004

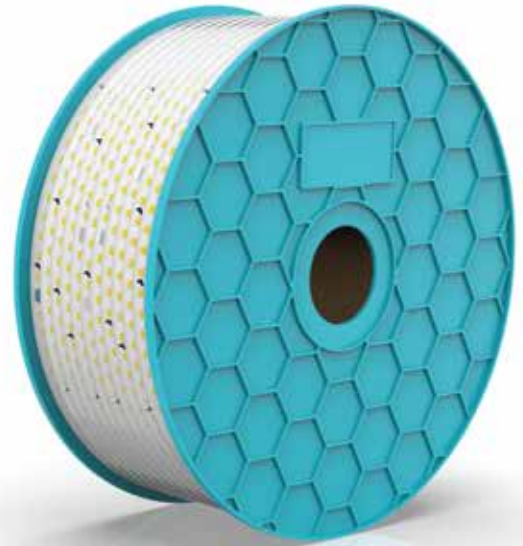

Product Size

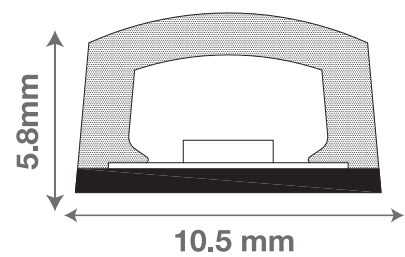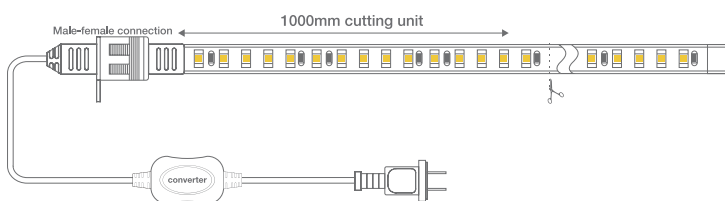

Available Colors

COOL WHITE

WARM WHITE

AMBER

RED

GREEN

BLUE

PINK

ICE BLUE


 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 120 LED/MTR	 lm 900/MTR	 CRI >80
---	--	--	--	---	--	---	--

Applications

Homes, balconies, gardens, stairs, windows, shop display borders, party decoration, festival lighting, and small indoor/outdoor décor projects.

Technical Specifications

Model No.	P10C Series - 0004
Quantity	100mtr (customization)
Power Source	8w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	CW WW Other Colors (customization)
CRI	>80 (customization)
Luminous Efficiency	900lm/mtr (customization)
Flexible Pcb	8mm Pcb (customization)
No. Of Led	120 Led/mtr
Rated Life	50000 Hr (customization)
IP Rating	IP65

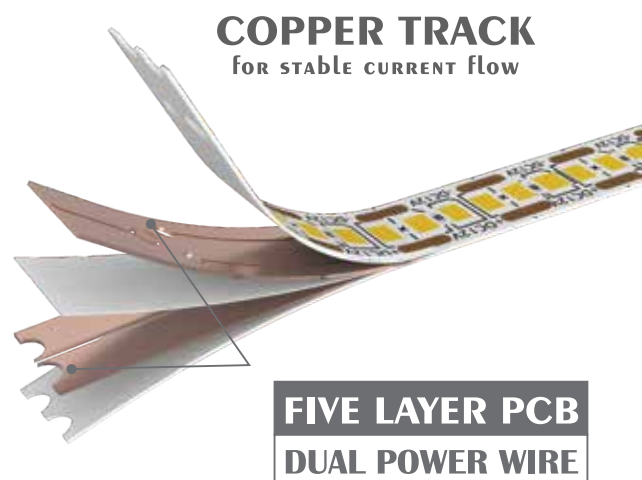


Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
100M	5 BOX	--	--	--






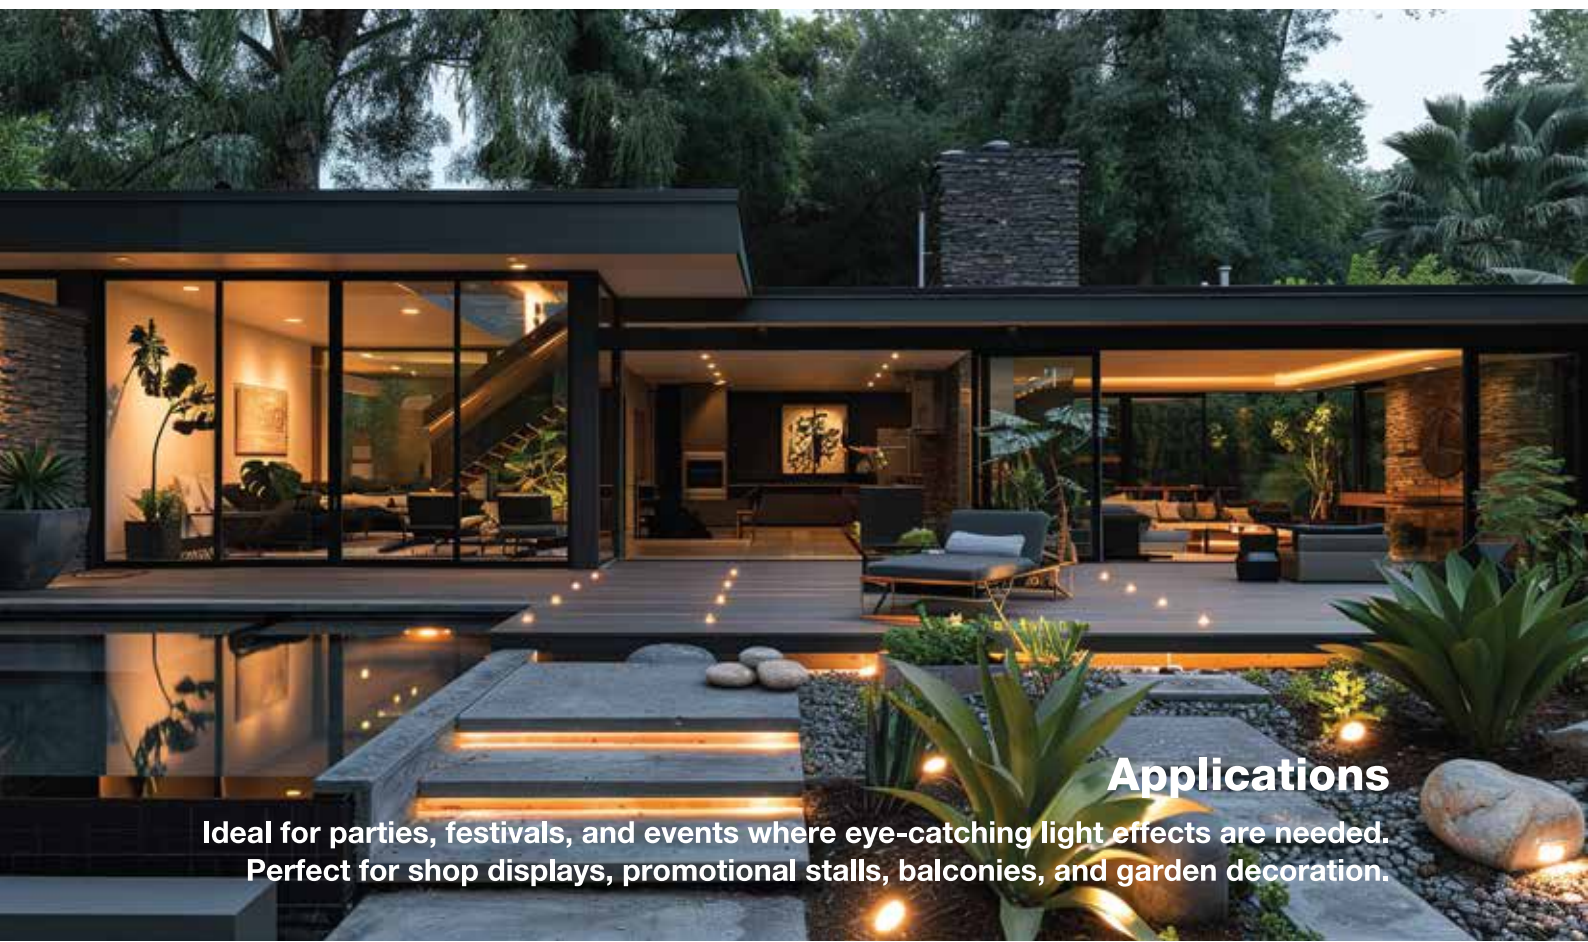



Applications

Ideal for parties, festivals, and events where eye-catching light effects are needed.
Perfect for shop displays, promotional stalls, balconies, and garden decoration.

BL SERIES - 0005

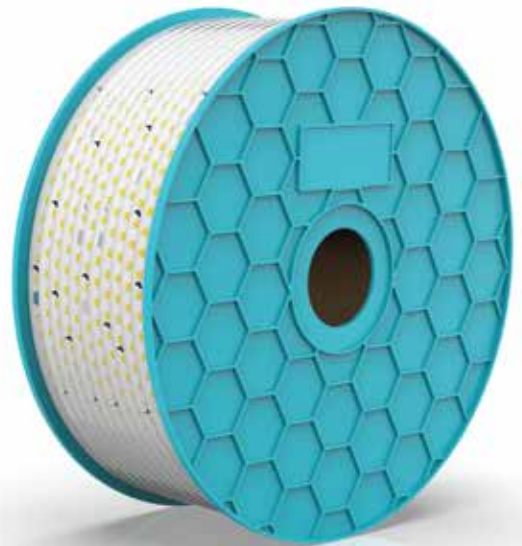

Product Size

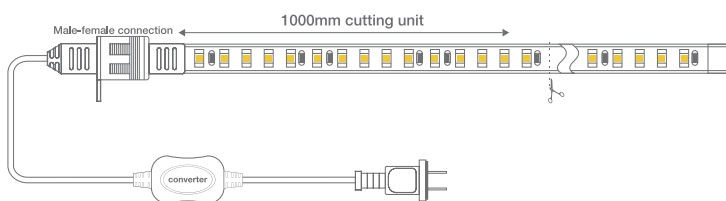

Available Colors

COOL WHITE

WARM WHITE

AMBER

RED

GREEN

BLUE

PINK

ICE BLUE


 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 120 LED/MTR	 lm 500 800/MTR	 CRI >70
---	--	--	--	---	--	---	--

Applications

Ideal for parties, festivals, and events where eye-catching light effects are needed.
Perfect for shop displays, promotional stalls, balconies, and garden decoration.

Technical Specifications

Model No.	BL Series (Lens Model) - 0005
Quantity	90mtr (customization)
Power Source	8w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	CW WW Other Colors (customization)
CRI	>70 (customization)
Luminous Efficiency	500lm/mtr 800lm/mtr (customization)
Flexible Pcb	6mm (30uA Aluminium) (customization)
No. Of Led	120 Led/mtr
Rated Life	50000 Hr (customization)
IP Rating	IP65

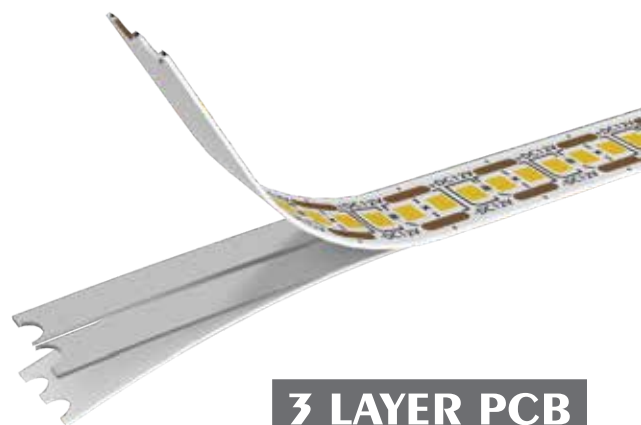


3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
90M	--	--	--	--





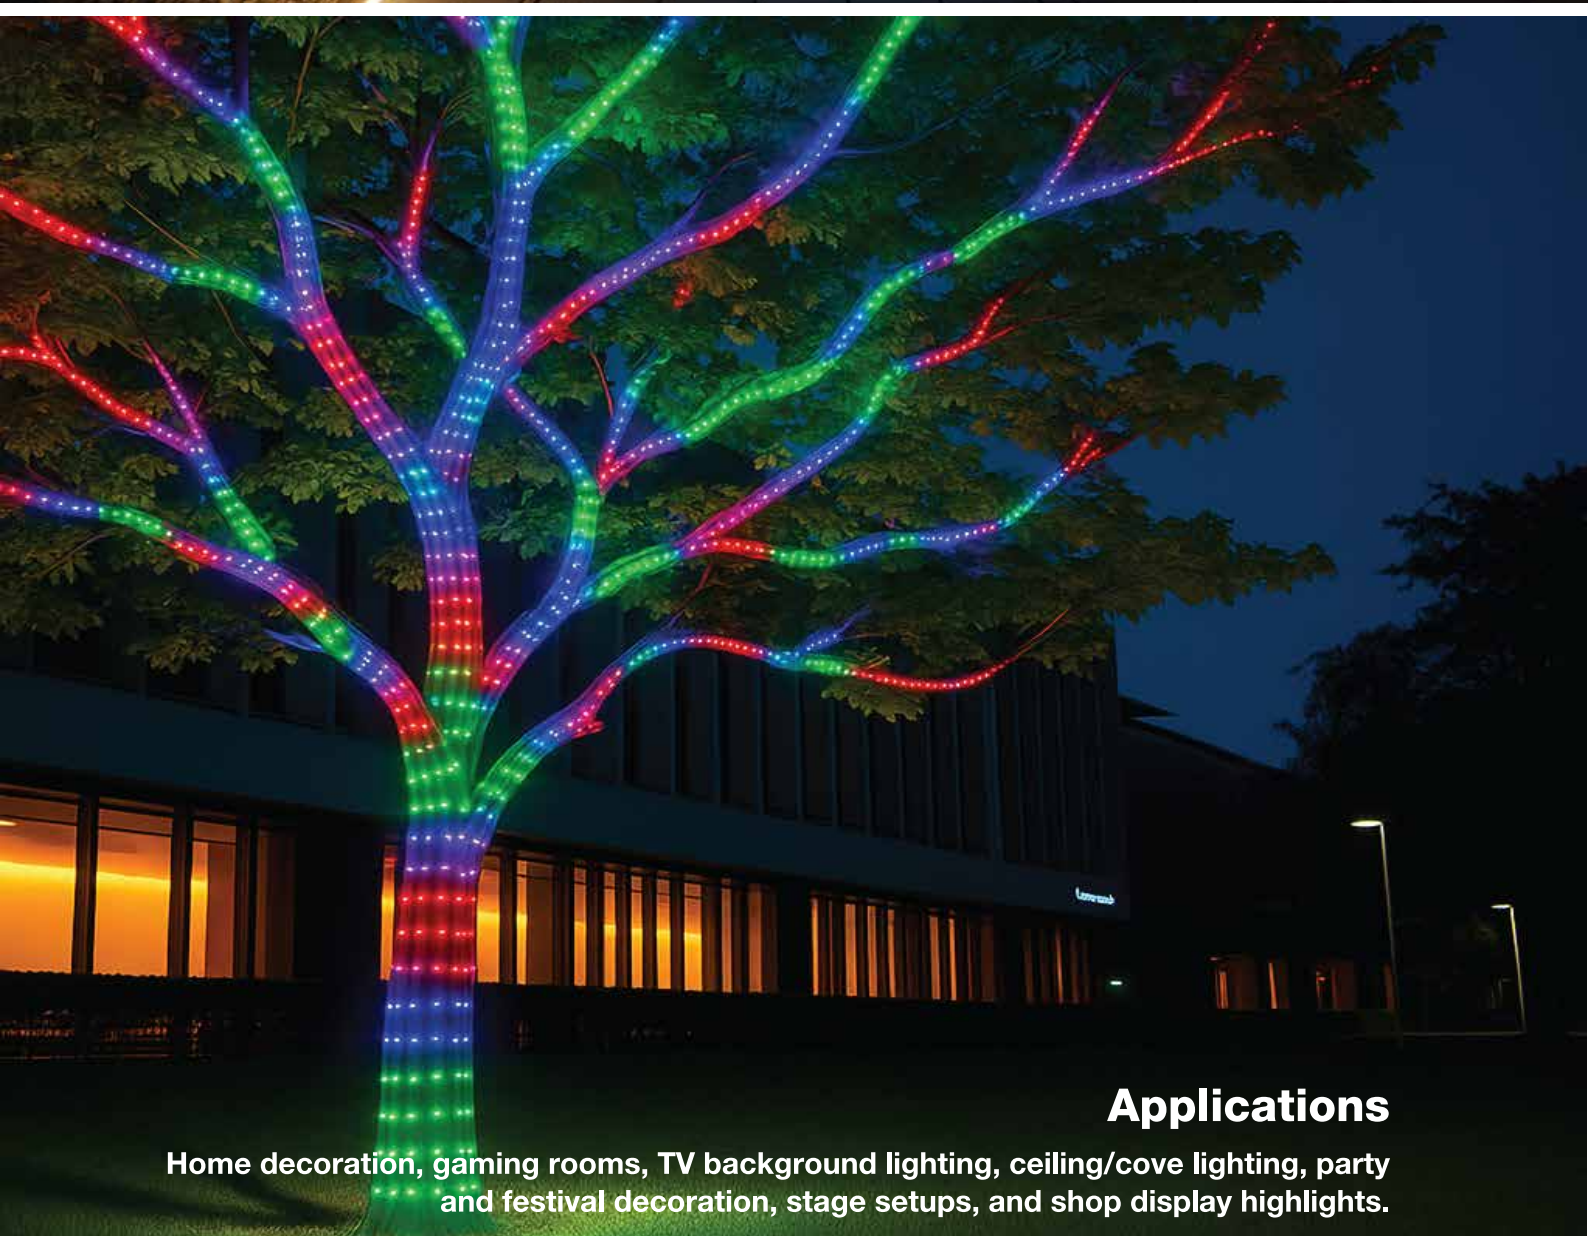



Applications

Home decoration, gaming rooms, TV background lighting, ceiling/cove lighting, party and festival decoration, stage setups, and shop display highlights.

5050 RGB SERIES - 0006



Product Size

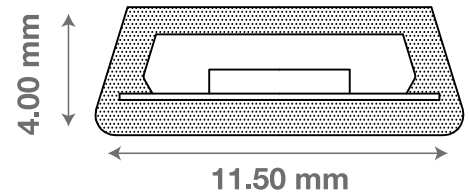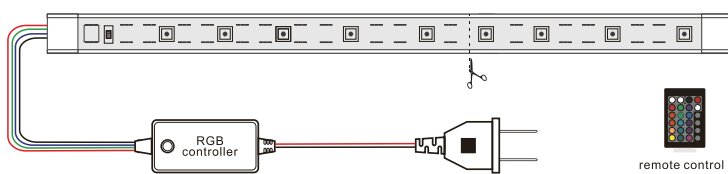

Available Colors




 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 60 LED/MTR	 LED RGB	 CRI >80
---	--	--	--	---	--	--	--

Applications

Home decoration, gaming rooms, TV background lighting, ceiling/cove lighting, party and festival decoration, stage setups, shop display highlights, and outdoor mood lighting (if waterproof).

Technical Specifications

Model No.	RGB 5050 Series - 0006
Quantity	45mtr (customization)
Power Source	--
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	RGB (customization)
CRI	>80 (customization)
Luminous Efficiency	Led RGB (customization)
Flexible Pcb	10mm Pcb (customization)
No. Of Led	60 Led/mtr
Rated Life	20000 Hr (customization)
IP Rating	IP65

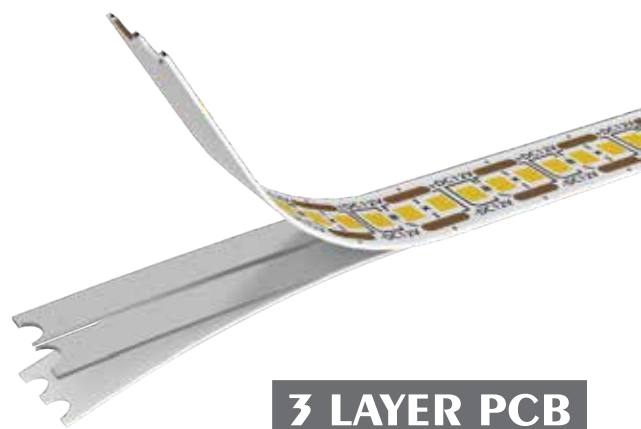

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
45M	10 BOX	520*500*260	23KG	24.2KG








Applications

Living room and bedroom lighting, TV and gaming setup lighting, restaurants and cafés, party halls, event decoration, stage lighting, and mood lighting for indoor and outdoor spaces (if waterproof).

6 LED RGB SERIES - 0007



Product Size

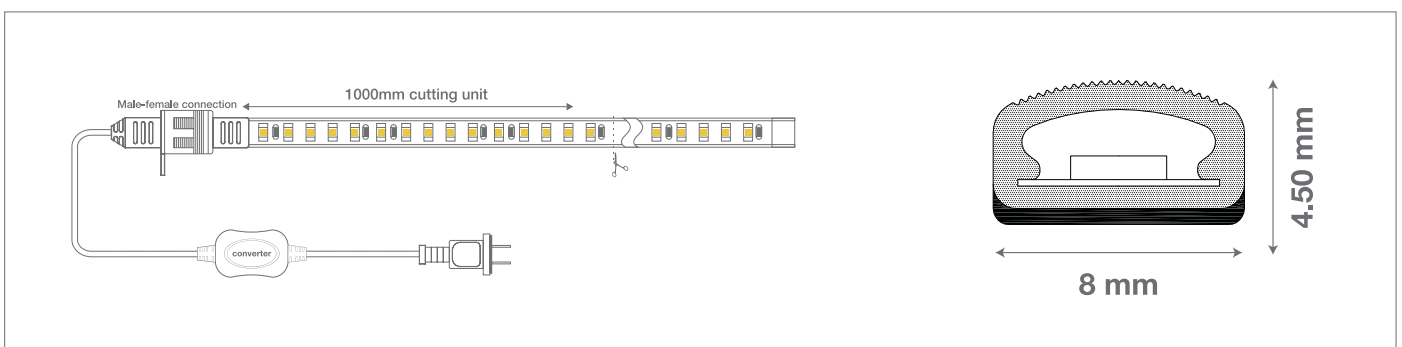

Available Colors




 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 48 LED/MTR	 6 LED RGB	 CRI >70
---	--	--	--	---	---	--	--

Applications

Living room and bedroom lighting, TV and gaming setup lighting, restaurants and cafés, party halls, event decoration, stage lighting, and mood lighting for indoor and outdoor spaces (if waterproof).

Technical Specifications

Model No.	6 LED RGB Series - 0007
Quantity	25mtr 45mtr (customization)
Power Source	---
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	RGB (customization)
CRI	>70 (customization)
Luminous Efficiency	6 Led RGB (customization)
Flexible Pcb	6mm (30uA Aluminium) (customization)
No. Of Led	48 Led/mtr
Rated Life	20000 Hr (customization)
IP Rating	IP65

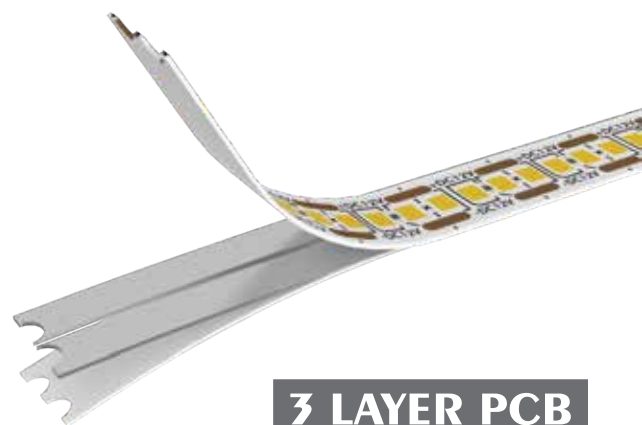

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
25M	10 BOX	--	--	--
45M	10 BOX	--	--	--





Applications



National festivals (Independence Day, Republic Day), government buildings, schools & colleges, event stages, cultural programs, rallies, public places, and monument decoration.



TIRANGA SERIES - 0008



Product Size

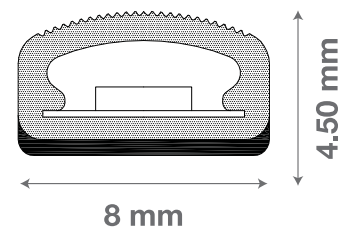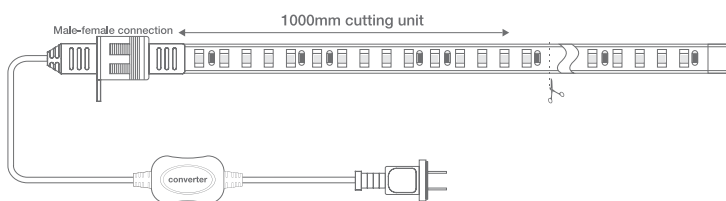

Available Colors

AMBER



WHITE



GREEN




 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 65	 ANTI-FLAMING	 120 LED/MTR	 lm 500	 CRI > 70
---	--	--	--	---	--	---	---

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	TIRANGA Series - 0008
Quantity	9mtr 15mtr 30mtr (customization)
Power Source	8w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	Amber White Green (customization)
CRI	>70 (customization)
Luminous Efficiency	400lm/mtr (customization)
Flexible Pcb	6mm (30uA Aluminium) (customization)
No. Of Led	120 Led/mtr
Rated Life	20000 Hr (customization)
IP Rating	IP65

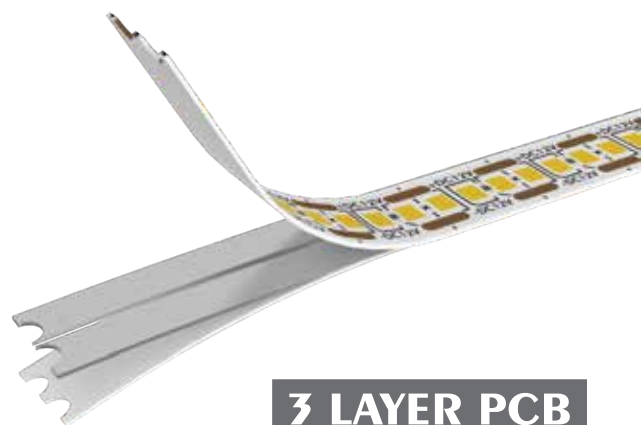

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
9M	10 BOX	--	--	--
15M	10 BOX	520*500*260	23KG	24.2KG
30M	4 BOX	484*245*385	17.2KG	18KG





**CREATE AMBIENCE.
SHAPE MOOD. HIGHLIGHT PERFECTION.**







Applications


Perfect for premium architectural and interior lighting—ideal for ceilings, furniture highlights, showrooms, and décor accents.



F-1 LED STRIP LIGHT



Product Size

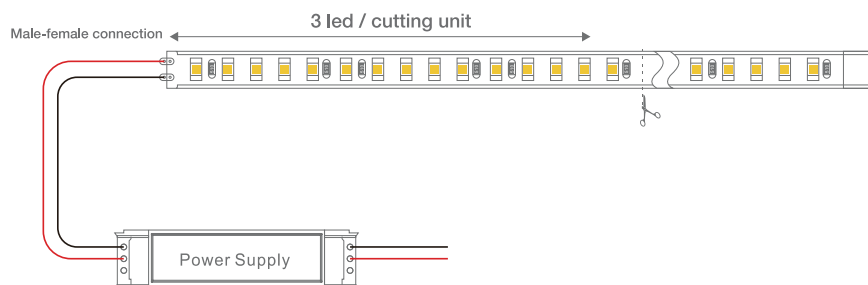

Available Colors

3000k



4000k



5000k



6500k




 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 20	 ANTI-FLAMING	 240 LED/MTR	 1m 2200/mtr	 CRI >80
---	--	--	--	---	--	--	--

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	F-1 Led Strip Light
Quantity	5mtr 10mtr (customization)
Power Source	16w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	3000k 4000k 5000k 6500k
CRI	>80 (customization)
Luminous Efficiency	2200lm/mtr (customization)
Beam Angle	120°
Flexible Pcb	9.6mm (35/70µm Copper) (customization)
No. Of Led	240 Led/mtr
Lm/Led	26lm
Rated Life	60000 Hrs (customization)
IP Rating	IP20

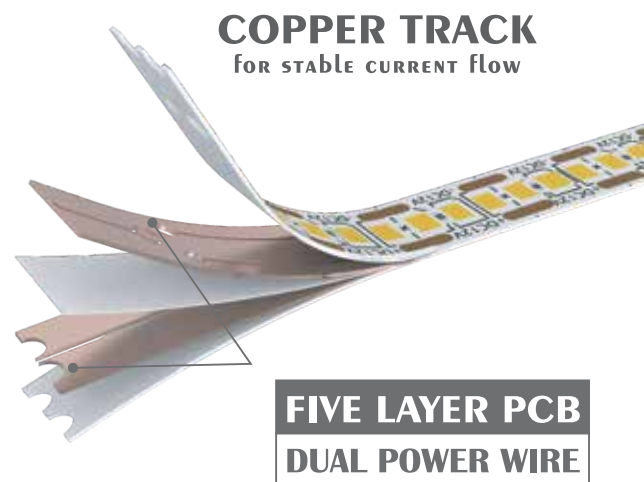


Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
5M	100 BOX	385*280*280	7.5kg	8kg





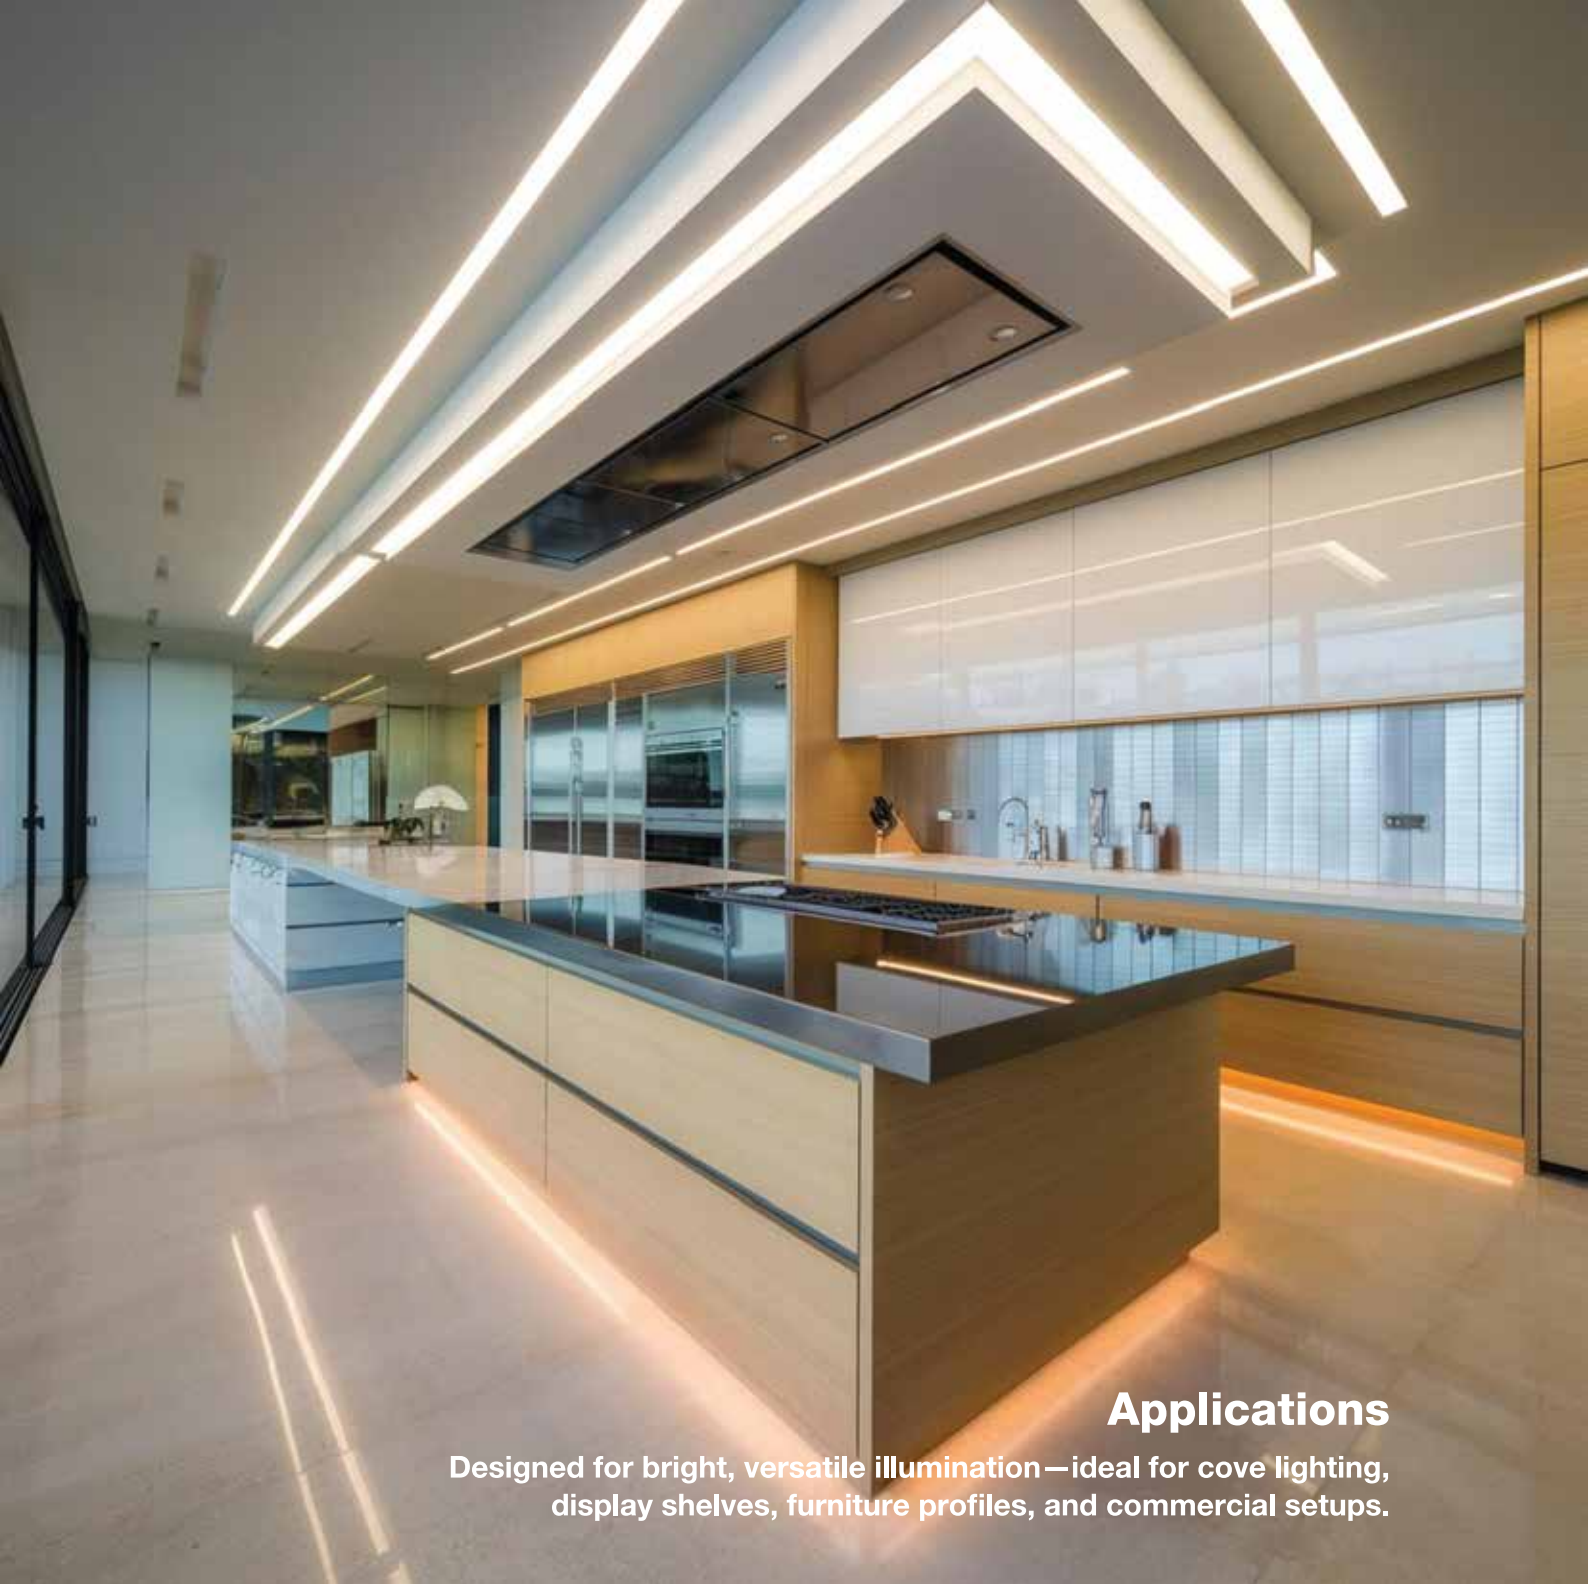


Applications


Designed for bright, versatile illumination—ideal for cove lighting, display shelves, furniture profiles, and commercial setups.



F-2 LED STRIP LIGHT

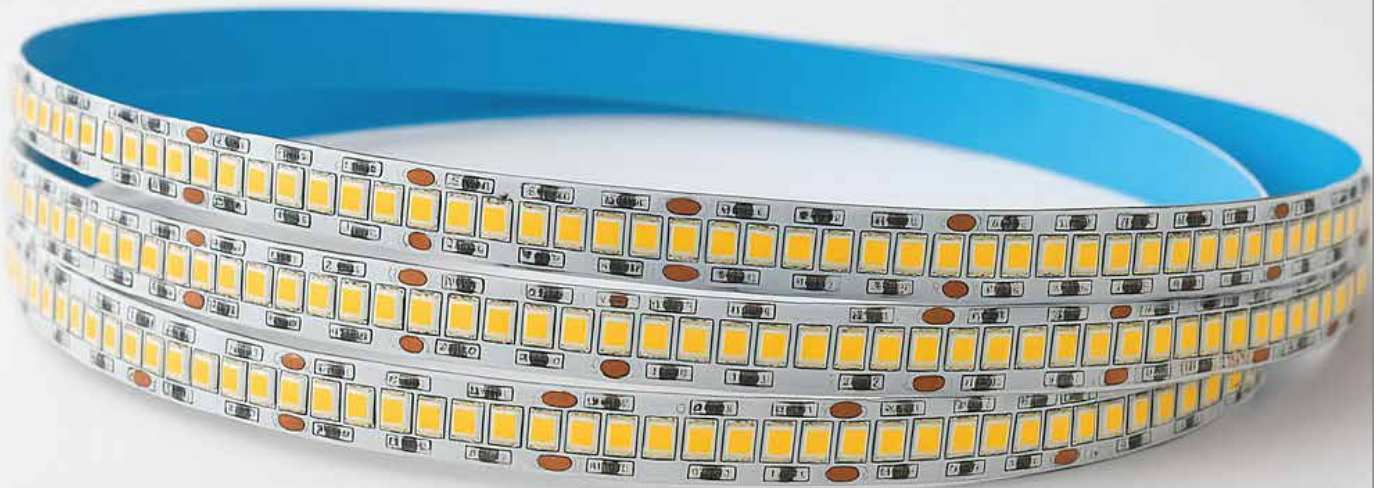

Product Size

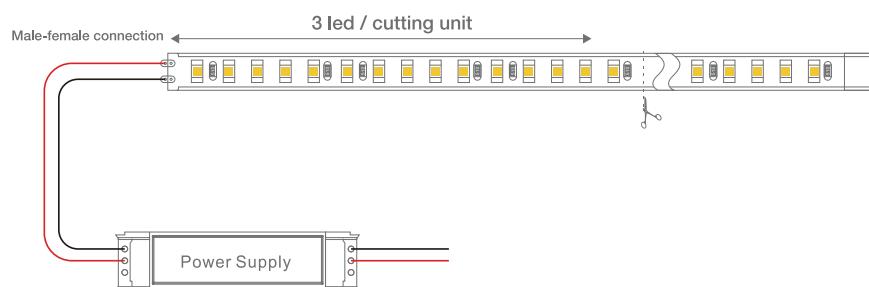

Available Colors

3000k

4000k

5000k

6500k


 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 20	 ANTI-FLAMING	 240 LED/MTR	 1m 1600/mtr	 CRI > 70
---	--	--	--	---	--	--	---

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	F-2 Led Strip Light
Quantity	5mtr 10mtr (customization)
Power Source	16w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	3000k 4000k 5000k 6500k
CRI	>70 (customization)
Luminous Efficiency	1600lm/mtr (customization)
Beam Angle	120°
Flexible Pcb	9.6mm (18/25µm Copper) (customization)
No. Of Led	240 Led/mtr
Lm/Led	22lm
Rated Life	50000 Hrs (customization)
IP Rating	IP20

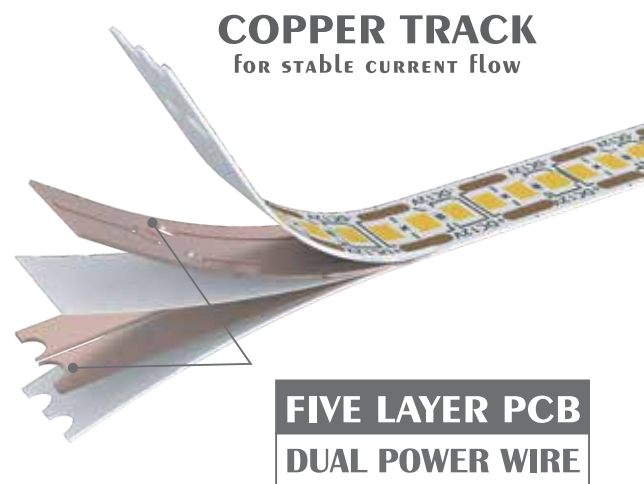

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
5M	100 BOX	385*280*280	--	--





Applications

High-efficiency lighting solution ideal for showrooms, retail branding, display counters, and architectural accents.






G-10 LED STRIP LIGHT



Product Size

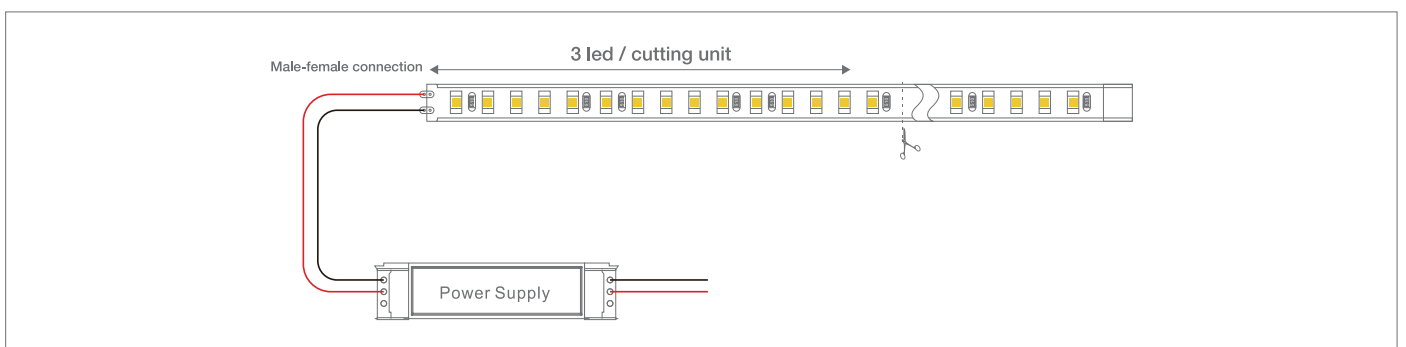

Available Colors

3000k




6500k



4000k



5000k




 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 20	 ANTI-FLAMING	 240 LED/MTR	 1m 1200/mtr	 CRI > 70
---	--	--	--	---	--	--	---

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	G-10 Led Strip Light
Quantity	5mtr 10mtr (customization)
Power Source	16w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	3000k 4000k 5000k 6500k
CRI	>70 (customization)
Luminous Efficiency	1200lm/mtr (customization)
Beam Angle	120°
Flexible Pcb	9.6mm (70µm Alum+Copper) (customization)
No. Of Led	240 Led/mtr
Lm/Led	20lm
Rated Life	35000 Hrs (customization)
IP Rating	IP20

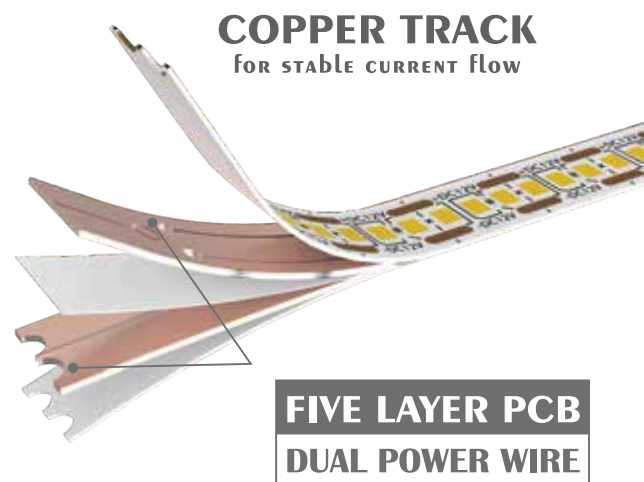

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
5M	100 BOX	385*280*280	--	--







Applications


Compact and powerful lighting designed for signage, display boards, decorative edges, and profile lighting.



R-10 LED STRIP LIGHT



Product Size

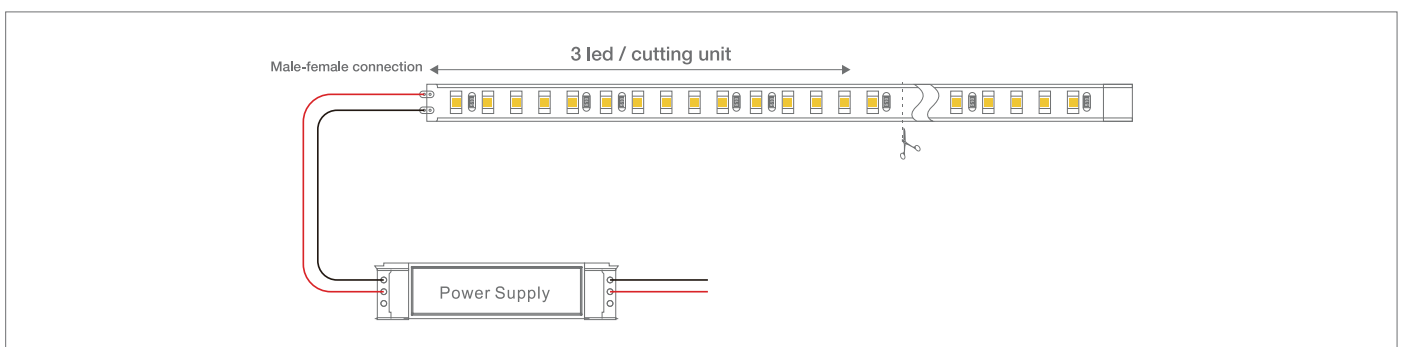

Available Colors

3000k



4000k



5000k



6500k



 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 20	 ANTI-FLAMING	 240 LED/MTR	 lm 900/mtr	 CRI > 70
---	--	--	--	---	--	---	---

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	R-10 Led Strip Light
Quantity	5mtr 10mtr (customization)
Power Source	16w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	3000k 4000k 5000k 6500k
CRI	>70 (customization)
Luminous Efficiency	900lm/mtr (customization)
Beam Angle	120°
Flexible Pcb	9.6mm (30µm Alum) (customization)
No. Of Led	240 Led/mtr
Lm/Led	14lm
Rated Life	20000 Hrs (customization)
IP Rating	IP20



COPPER TRACK
for STABLE CURRENT flow

3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
5M	100 BOX	385*280*280	--	--







Applications


Delivers clean visibility and true colour rendering—perfect for workspaces, furniture highlights, and architectural lighting.



220NW



Product Size

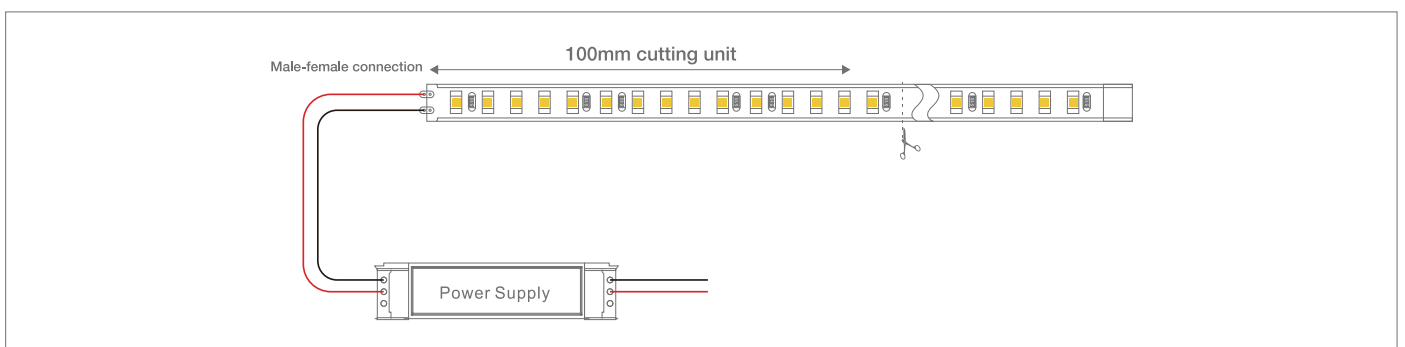

Available Colors

3000k



4000k



5000k



6500k




 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 20	 ANTI-FLAMING	 240 LED/MTR	 lm 800/mtr	 CRI >70
---	--	--	--	---	---	---	--

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	220NW
Quantity	50mtr (customization)
Power Source	16w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	3000k 4000k 5000k 6500k
CRI	>70 (customization)
Luminous Efficiency	800lm/mtr (customization)
Beam Angle	120°
Flexible Pcb	9.6mm (30µm Aluminium) (customization)
No. Of Led	240 Led/mtr
Lm/Led	---
Rated Life	35000 Hrs (customization)
IP Rating	IP20

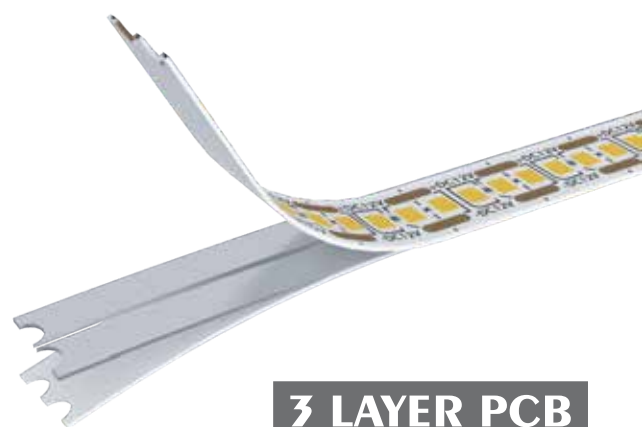


3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
50M	--	--	--	--



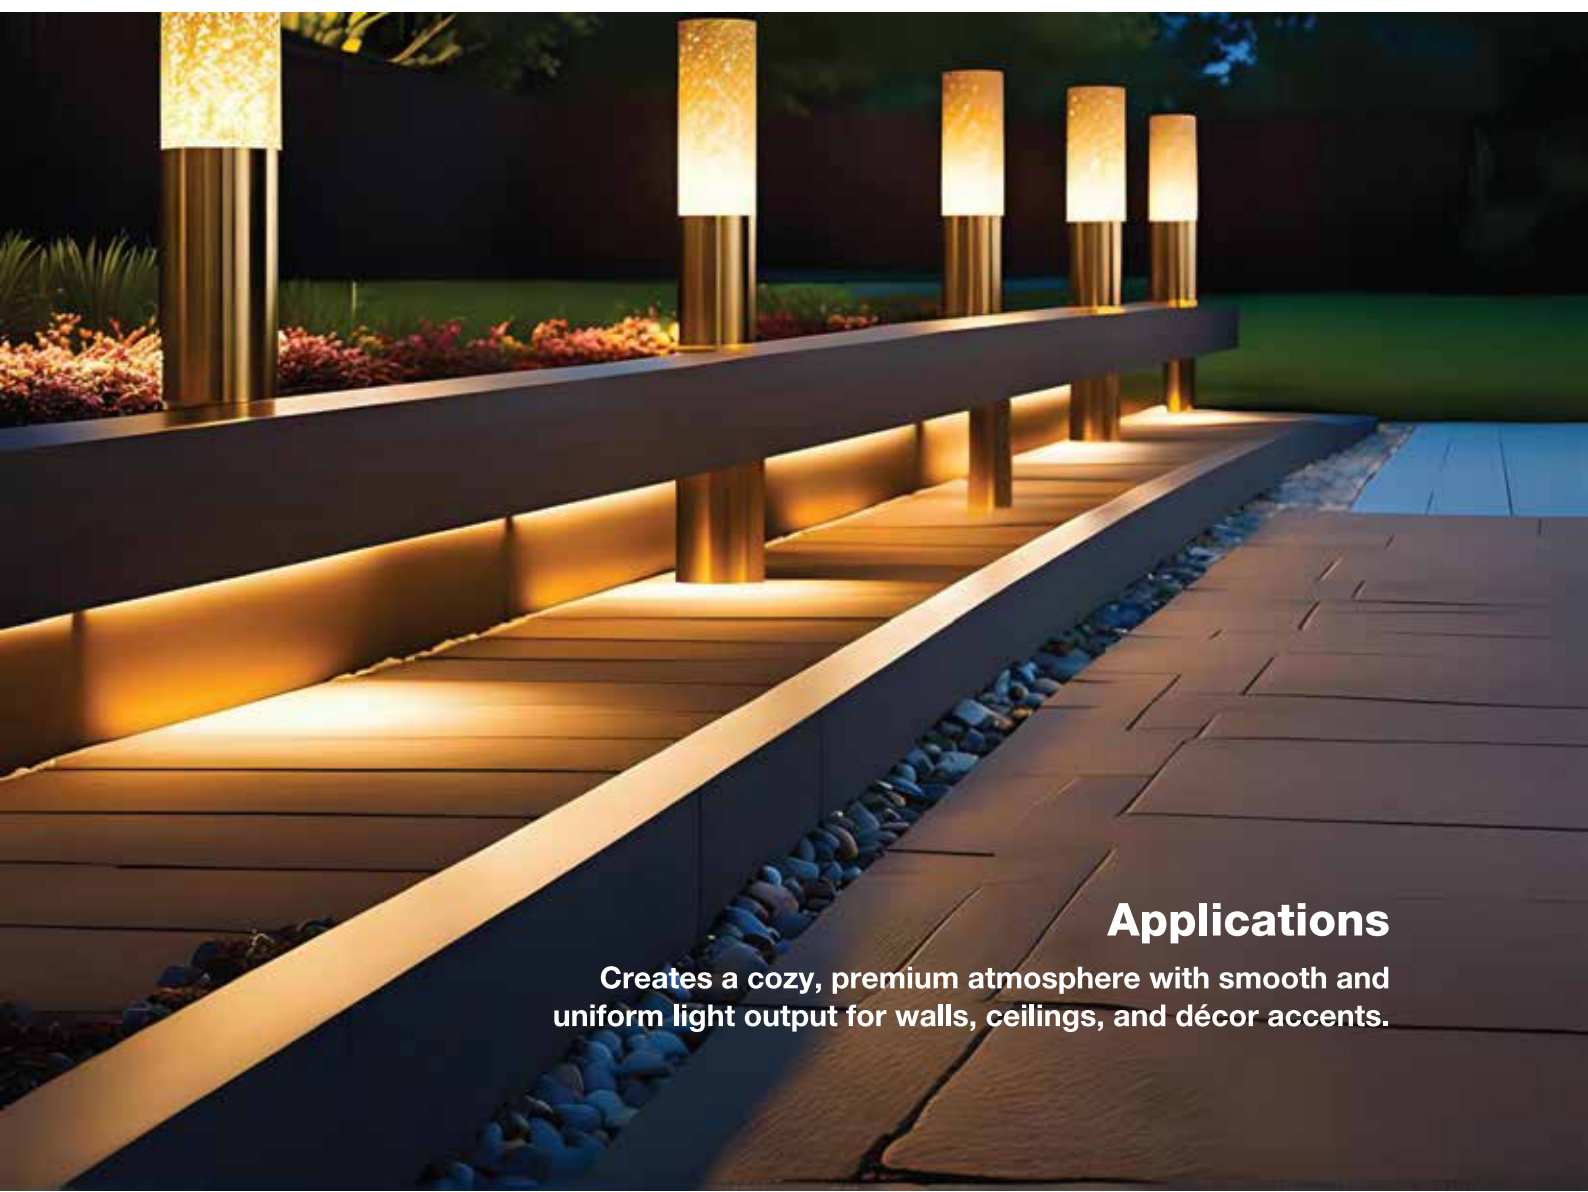

Applications


Creates a cozy, premium atmosphere with smooth and uniform light output for walls, ceilings, and décor accents.



220WP



Product Size

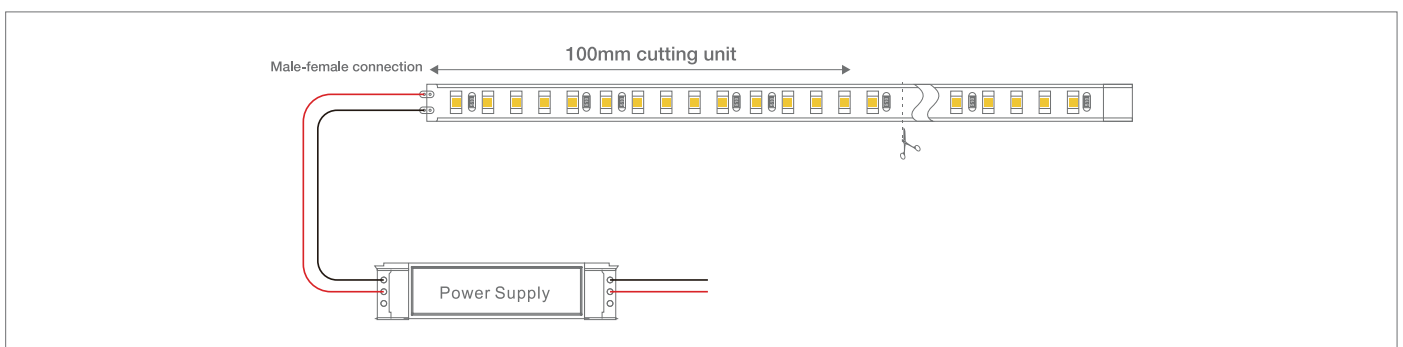

Available Colors

3000k



4000k



5000k



6500k



 FEATURES	 DEPEND ON ADAPTOR	 BRIDGELUX LED	 IP 20	 ANTI-FLAMING	 240 LED/MTR	 1m 1600/mtr	 CRI >70
---	--	--	--	---	--	--	--

Applications

National festivals (Independence Day, Republic Day), government buildings, schools and colleges, event stages, cultural programs, rallies, public places, shops, and monument decoration.

Technical Specifications

Model No.	220WP
Quantity	50mtr (8mm/11mm) (customization)
Power Source	16w/mtr (customization)
Input Voltage	220v AC with Adaptor
Surge Protection	Depend on Adaptor
Colour	3000k 4000k 5000k 6500k
CRI	>70 (customization)
Luminous Efficiency	1600lm/mtr (customization)
Beam Angle	120°
Flexible Pcb	9.6mm (30µm Aluminium) (customization)
No. Of Led	120 240 Led/mtr
Lm/Led	---
Rated Life	35000 Hrs (customization)
IP Rating	IP20



3 LAYER PCB
SINGLE POWER WIRE

Box Packaging

OEM BOX PACKAGING - OUTER				
ITEM	NO.OF BOX IN CRT.	SIZE IN MM	NET WEIGHT	GROSS WEIGHT
50M (8mm)	--	--	--	--
50M (11mm)				



OEM



POWER YOUR
LIGHTING SOLUTIONS



2 YEARS WARRANTY



OVER CURRENT PROTECTION



AVIATION ALUMINUM



FULL POWER



HIGH QUALITY MATERIAL



HIGH SURGE PROTECTION

MODEL NO	WATT	CURRENT	TYPE	VOLTAGE	HIGH VOLTAGE	SURGE PROT.	SIZE(MM)
OP-010060	60W	5A	Isolated	12 VDC	440 VAC	4KV	120*35*23
OP-010120	120W	10A	Isolated	12 VDC	440 VAC	4KV	139*47*24
OP-010200	200W	16.7A	Isolated	12 VDC	440 VAC	4KV	178*48*24
OP-010300	300W	25A	Isolated	12 VDC	440 VAC	4KV	205*48*24
OP-010400	400W	33.3A	Isolated	12 VDC	440 VAC	4KV	238*48*24

Dudhat Industries Pvt. Ltd.



Contact for OEM : +91 93280 61721



Plot No. 218, Phase-5, Rudra Industrial Park,
B/H NK Estate, Bakrol Bujrang, Ahmedabad - 382433, Gujarat

